



# Rover Puck by CLEAR Firmware Instructions

## Verify Software Version

1. Connect to Device Home Page by typing <http://Puck> into the web browser
2. Log on and navigate to Router Status. The default password is located on the back of the device
3. Record the firmware version

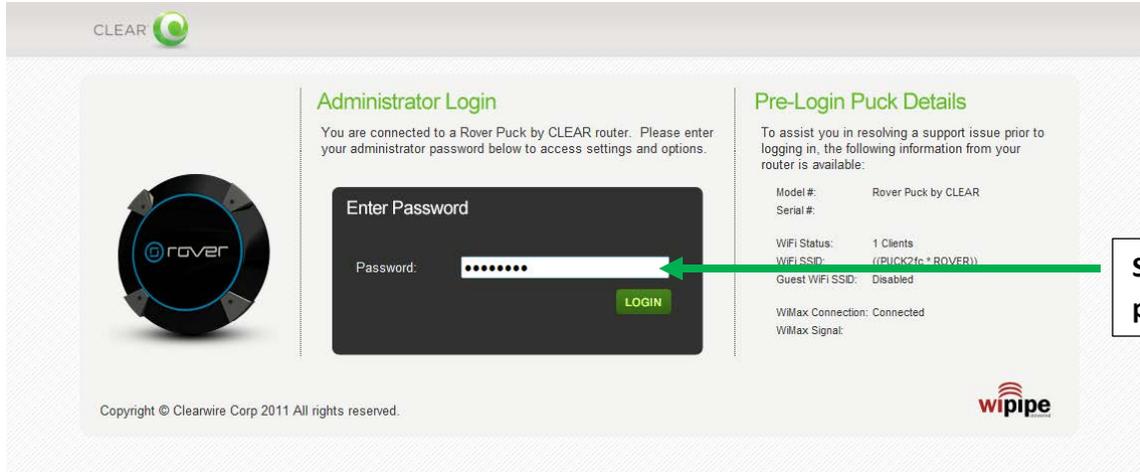

**Step 2: Enter password**

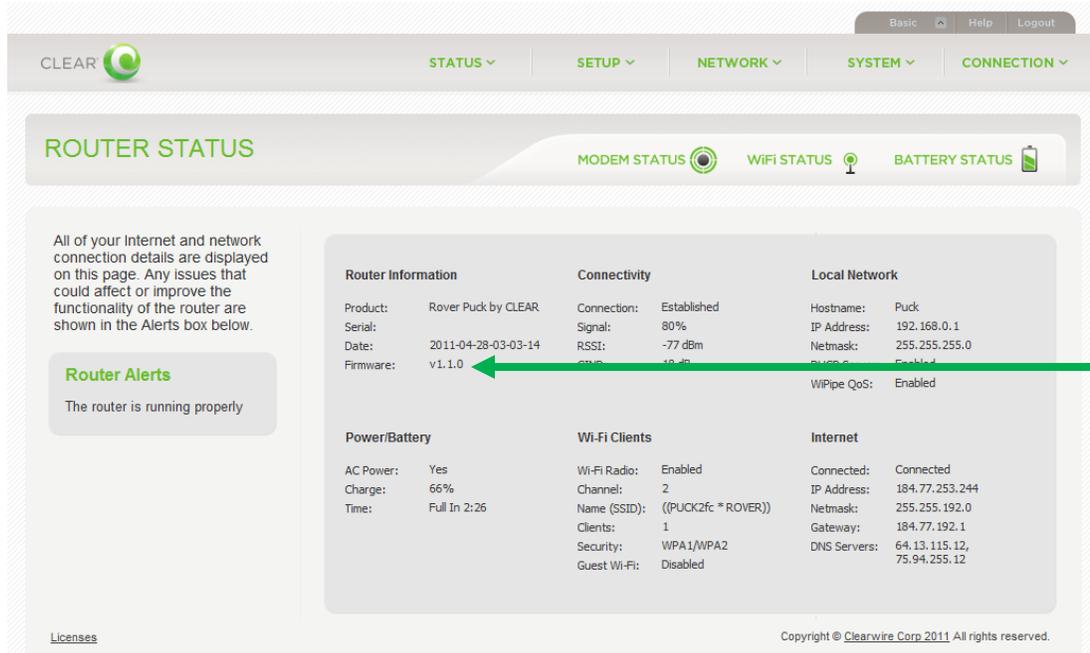

**Firmware version**

## Updating Software Version

1. Go to <http://www.clear.com/support/download> and navigate through the list of products to select the correct device. Verify if device has a recommended software installed
2. Download the new software to a location on the computer by selecting Firmware Update and Store
3. Connect to Device Home Page by typing <http://Puck> into the web browser
4. Enter the default password to gain Administrative rights. Navigate to the System tab and select Software from the dropdown menu
5. Click the MANUAL FIRMWARE UPLOAD button and navigate to the stored firmware file (ipk extension) on the computer
6. Select Factory Reset button and follow screen instruction
7. Once upgrade is complete, the device will automatically reboot
8. Verify the upgrade is successful by looking at the firmware version
9. Verify that the device can connect to Wi-Fi and CLEAR 4G network and access the Internet.

What Is CLEAR? Service Plans Devices Packages Coverage Map Answers

Answers Home > Downloads >

Quick Link

### Rover Puck by CLEAR

**Downloads**

- [Device Specifications](#) (729 kb PDF)
- [Installation Guide](#) (1.2 mb PDF)

**Easy to Use**

- Turn it on and go
- Share 4G take-it-with-you internet with up to eight wi-fi-enabled devices at the same time
- Works in every city with CLEAR

**Compact and Portable**

- Runs on a rechargeable battery that provides 4 hours of continuous use
- Works while recharging through the included wall charger, Car Charger or your computer USB port

**Secure and Reliable**

- Prevents unauthorized use of your connection
- Supports 802.11b/g/n wi-fi-enabled devices
- Built for reliability with minimal set up and no maintenance

**Step 1: Online Device Page for updated firmware**

CLEAR  STATUS ▾ SETUP ▾ NETWORK ▾ SYSTEM ▾ CONNECTION ▾

## SYSTEM SOFTWARE

MODEM STATUS  WIFI STATUS  BATTERY STATUS 

### FIRMWARE UPGRADE

Current Firmware Version: v1.1.0 (Thu Apr 28 2011)

Available Firmware Version: Up to date [CHECK AGAIN](#)

Factory Reset:

[AUTO MATIC \(INTERNET\)](#) [MANUAL FIRMWARE UPLOAD](#)

### SYSTEM CONFIG SAVE/RESTORE

Backup Current Settings: [SAVE TO DISK](#)

Restore Settings: [UPLOAD FROM FILE](#)

#### Help Panel

**Firmware Upgrade:** This allows the admin to load new firmware onto the router to... you are in router, you because the firmw to decide

**Automatic:** download with no us router firmware from an attached computer.

**Manual:** router firmware from an attached computer.

**Factory Reset:** Set default settings to match the new firmware. This is safest as settings may have changed. You should backup your current settings and restore them after the new firmware is loaded.

**Backup Current Settings:** Save your current settings to a file on a computer.

**Restore Settings:** Restore your previous settings from a file on a computer.

Licenses Copyright © Clearwire Corp 2011 All rights reserved.

**Step 5: MANUAL FIRMWARE UPLOAD button**

CLEAR  STATUS ▾ SETUP ▾ NETWORK ▾ SYSTEM ▾ CONNECTION ▾

## ROUTER STATUS

MODEM STATUS  WIFI STATUS  BATTERY STATUS 

All of your Internet and network connection details are displayed on this page. Any issues that could affect or improve the functionality of the router are shown in the Alerts box below.

### Router Alerts

The router is running properly

Router Information		Connectivity		Local Network	
Product:	Rover Puck by CLEAR	Connection:	Established	Hostname:	Puck
Serial:		Signal:	80%	IP Address:	192.168.0.1
Date:	2011-04-28-03-03-14	RSSI:	-77 dBm	Netmask:	255.255.255.0
Firmware:	v1.1.0	SNR:	19 dB	Wi-Fi:	Enabled
				WiPipe QoS:	Enabled

Power/Battery		Wi-Fi Clients		Internet	
AC Power:	Yes	Wi-Fi Radio:	Enabled	Connected:	Connected
Charge:	66%	Channel:	2	IP Address:	184.77.253.244
Time:	Full In 2:26	Name (SSID):	{{PUCK2fc: * ROVER}}	Netmask:	255.255.192.0
		Clients:	1	Gateway:	184.77.192.1
		Security:	WPA1/WPA2	DNS Servers:	64.13.115.12, 75.94.255.12
		Guest Wi-Fi:	Disabled		

Licenses Copyright © Clearwire Corp 2011 All rights reserved.

**Step 8: Verify updated firmware version**