


Voyager


1. Open an internet browser and browse to the web address <http://clearspot> or <http://192.168.1.1>. The password is admin.




2. The modem will default to the Summary page when the user interface opens.

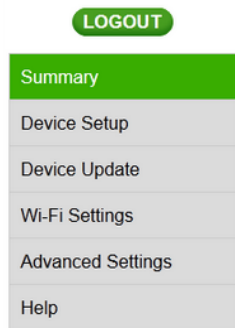

3. Select the “Advanced Settings” tab on the left side of the user interface.
 - The modem will default to the 4G Information after selecting the Advanced Settings (as shown below)

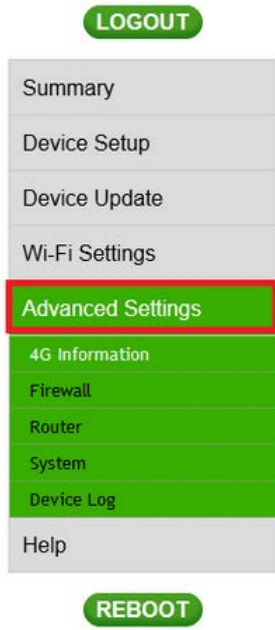


4. Click "Router" under "Advanced Settings".

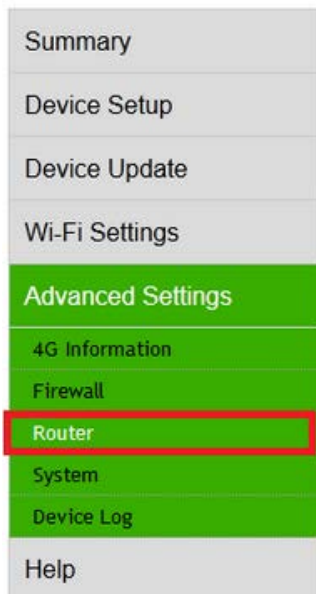

5. Once the UPnP and DMZ options have loaded verify that the "Enable UPnP IGD" checkbox is selected and the "DMZ IP Address" field is left blank.

Router Settings

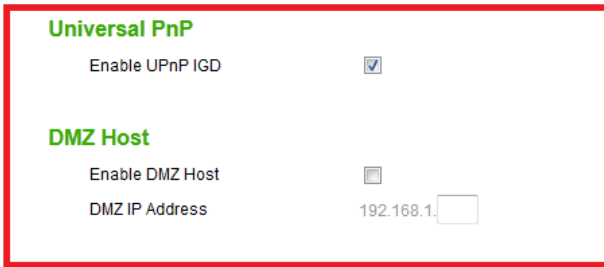


The screenshot shows a web interface for router settings. It is divided into two sections: "Universal PnP" and "DMZ Host". Under "Universal PnP", there is a checkbox labeled "Enable UPnP IGD" which is checked. Under "DMZ Host", there is a checkbox labeled "Enable DMZ Host" which is unchecked, and a text input field labeled "DMZ IP Address" containing the value "192.168.1." followed by a small empty box.

6. Scroll to the bottom and select "Apply".



7. A message should appear stating "Save Successful".

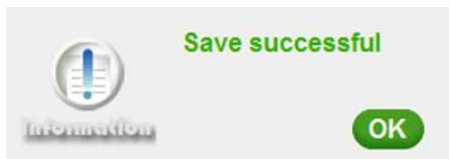


8. The modem will now need to be rebooted using the "Reboot" button within the Web UI.

- If this does not work, physically power cycle the modem for at least 30 seconds by powering the device off as normal
- Make sure to **NOT** complete a factory reset of the device



9. A prompt asking "Do you want to reboot the CLEAR Spot?" will appear. Select the "Yes" option.

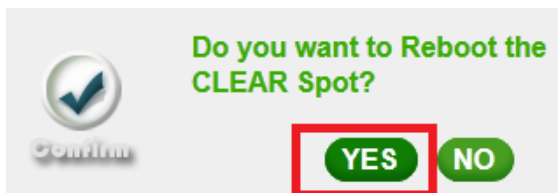

10. The System Reboot screen will appear during the reboot.

System Reboot

Please reconnect after your CLEAR Spot is completely rebooted.